



Specification

Display

- 2.8" Touch Screen

Face Capacity

- 3,000

Fingerprint Capacity

- 3,000

ID Card Capacity

- 10,000

Logs Capacity

- 100,000

Communications

- TCP/IP, WIFI, USB Host

Standard Functions

- ADMS, DST, Automatic Status Switch, Self-Service Query, Work Code, T9 input, 9 digit user ID, Scheduled-bell, Multiple Verify Mode

Optional Functions

- 125KHz ID/13.56MHz MiFare Cards

Operating System

- Linux

Basic Access Control Interface

- EM Lock 3rd Party Electric Lock, Door Sensor, Exit Button

Face Recognition Speed

- ≤ 1 second

Hardware

- Dual Core CPU

Memory 512MB RAM / 8G ROM

2MP WDR Low Light Camera

Adjustable Light Brightness LED

Power Supply

- 12V/1.5A

Operating Temperature

- 0° C - 45° C

Operation Humidity

- 20%-80%



Dimensions(L×H×D)

- 17 x 13.8 x 3.85cm

VF400

Hybrid Facial & Fingerprint Terminal for Time Attendance

Advanced Features




What is VF400

VF400 is a new Hybrid Facial & Fingerprint recognition terminal, It's latest visible light face identification algorithm can perform scanning in a distance from 0.3m to 1.5m. Capacity of up to 3,000 face templates and 3,000 fingerprint templates can be identified within 1 second. VF400 is best applied at factory, offices and retail outlets for Time Attendance purposes.

Installation & Communication Diagram

Time Attendance

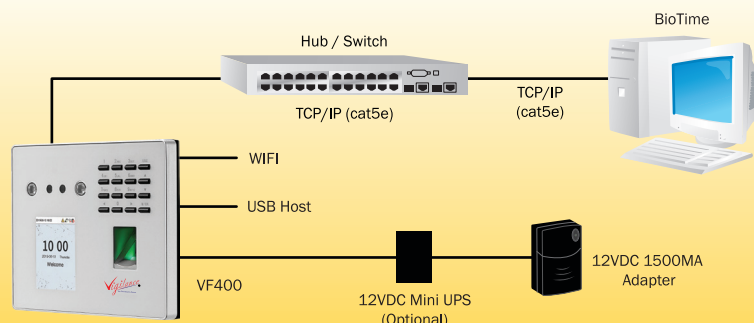

All product's informations/ specifications are subject to change without prior notice.

All rights reserved.
www.vigilance.com.my